
embidi

W25Q128JV - module electrical schematic

Supply and signal connections exported from the KiCad schematic.

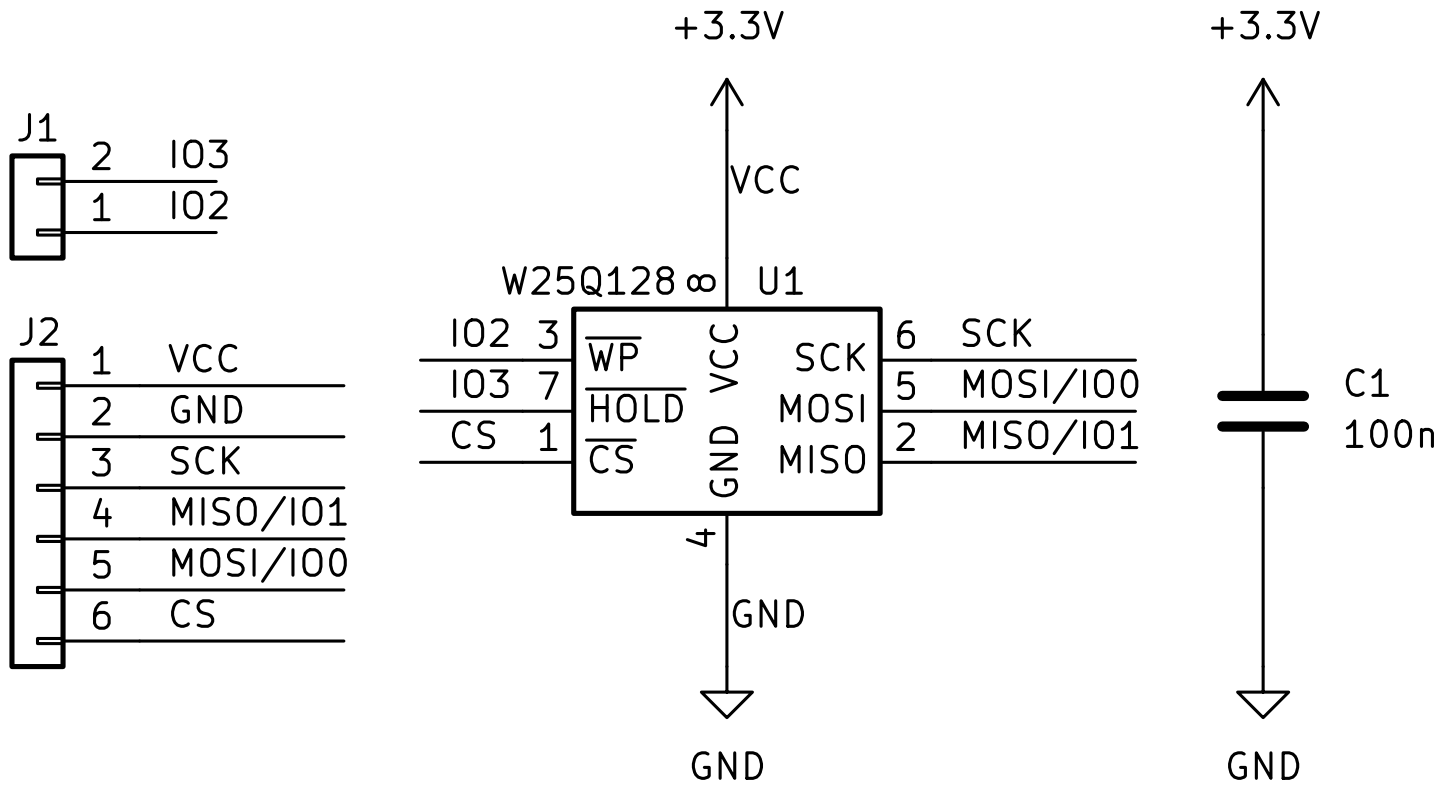

U1: W25Q128JVSIQ | C1: 100 nF (schematic) | VCC: 3.3 V nominal

The symbol labels /WP and /HOLD identify IO2 and IO3. For W25Q128JVSIQ, QE is factory fixed to 1 and /HOLD is disabled.

Source: Flash SPI.kicad_sch | Connector numbering follows the schematic; use the pinout drawing for physical orientation.